

uPVC DRAIN PIPE & FITTING

For Air-Conditioning Drainage Insulation

LITAFLEX's uPVC DRAIN PIPE are manufactured strictly in accordance to the Japanese Standard JIS 6741: 1999.


Constructed from High Impact Polyvinyl Chloride, which is self-extinguishing, and together with a comprehensive range of fittings, LITAFLEX Drain Pipe System is able to efficiently serve the drainage purpose of Air-Con water discharge, which are extremely corrosive.

Its light weight material and smooth bore minimizes the deposit build-up in the inner wall. By simply using the solvent cement welding method for the Fittings, installation is made easier, cost is reduced and time is saved.

Japanese Industrial Standard JIS K 6741 : 1999 Class VU/VP


Product No.	Nominal Size		Outside Diameter mm	Wall Thickness		Packing Local LG
	mm	inches		Class VU/AE mm	Class VP/AW mm	
DP 13	13	3/8	18	1.8	2.2	10
DP 16	16	1/2	22	1.8	2.7	10
DP 20	20	3/4	26	1.8	2.7	10
DP 25	25	1	32	1.8	3.1	10
DP 30	30	1 - 1/4	38	1.8	3.1	10
DP 40	40	1 - 1/2	48	1.8	3.6	10

LITAFLEX

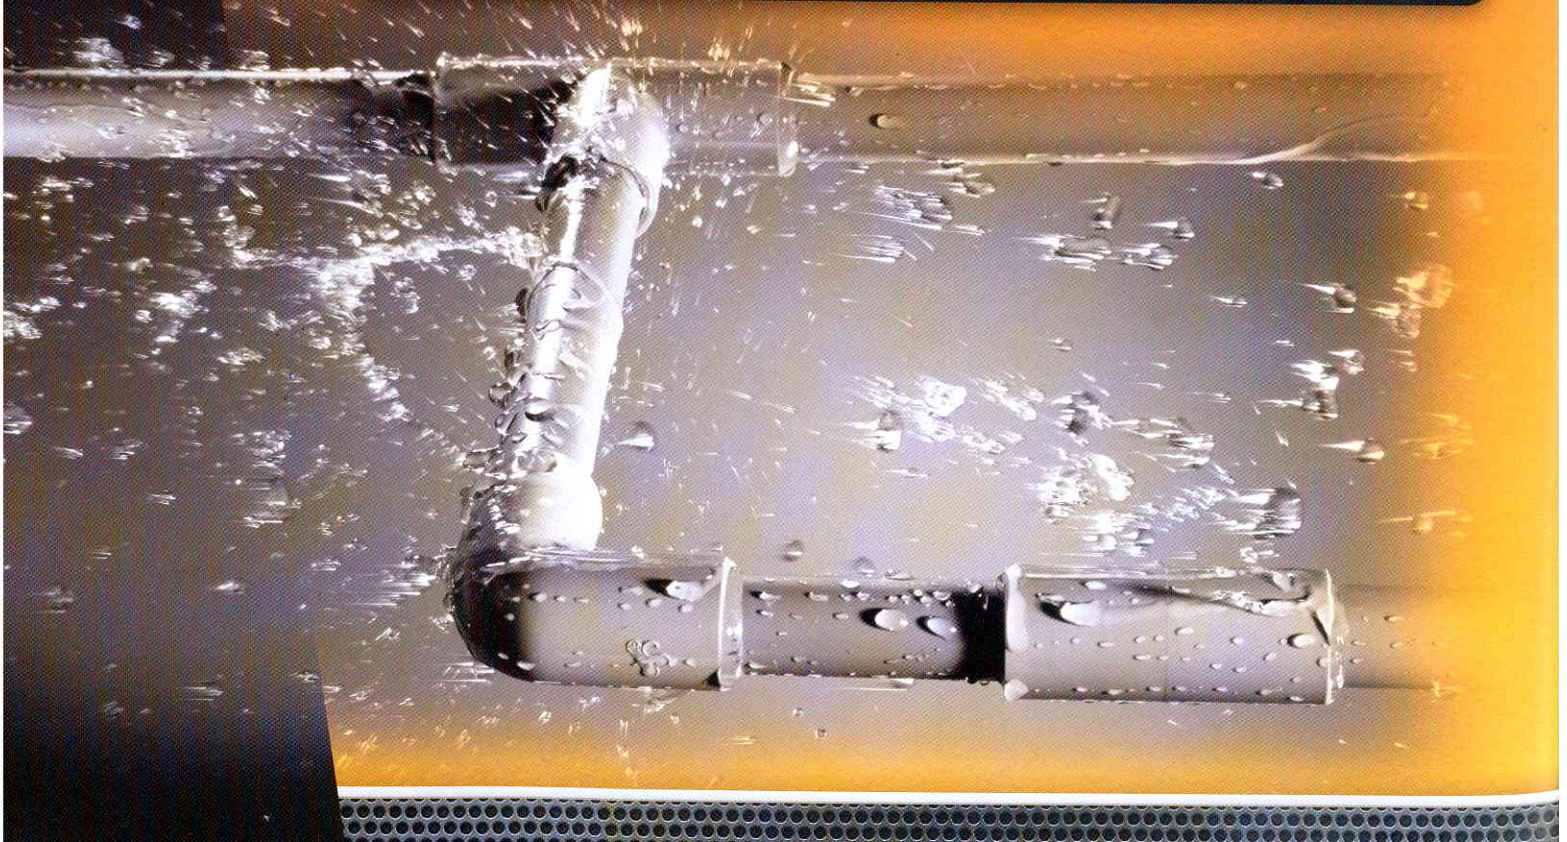


FEATURES

- 2.9 Meter length convenient for transportation
- Cooling Grey Colour to match Buildings
- Choice of Non-Pressure and Pressure Pipes

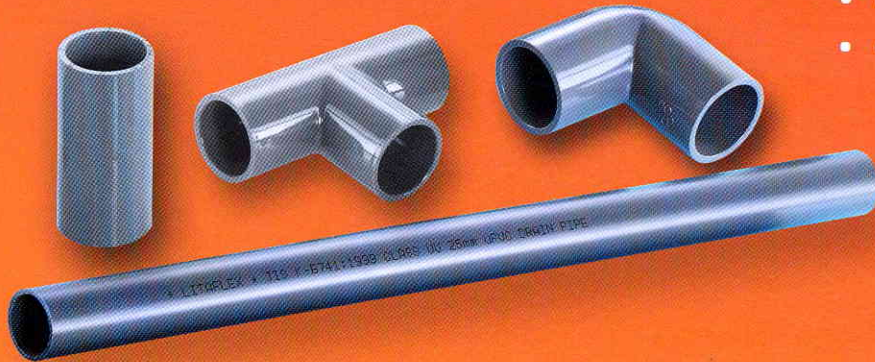

uPVC PIPE FITTINGS


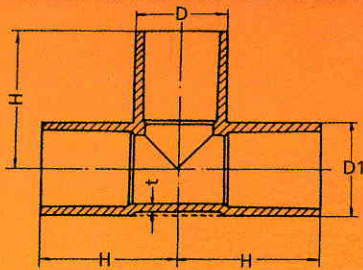


TEE JOINT

Product	Normal Size	D	t	H	D1	H1	Packing
DPF 13T	13	24	3.0	36	24	36	660
DPF 16T	16	29	3.5	43	29	43	400
DPF 20T	20	33	3.5	50	33	50	260
DPF 25T	25	40	4.0	58	40	58	180
DPF 30T	30	46	5.0	65	46	65	100
DPF 40T	40	57	4.5	82	57	82	100

ELBOW

Product	Normal Size	D	t	H	Packing
DPF 13E	13	24	3.0	36	1000
DPF 16E	16	29	3.5	43	600
DPF 20E	20	33	3.5	50	400
DPF 25E	25	40	4.0	58	300
DPF 30E	30	46	4.0	65	100
DPF 40E	40	57	4.5	82	100



SOCKET

Product	Normal Size	D	t	L	Packing
DPF 13S	13	24	3.0	29.0	1300
DPF 16S	16	29	3.5	33.5	800
DPF 20S	20	33	3.5	38.5	540
DPF 25S	25	40	4.0	44.0	300
DPF 30S	30	46	4.0	48.0	100
DPF 40S	40	57	4.5	59.5	100